




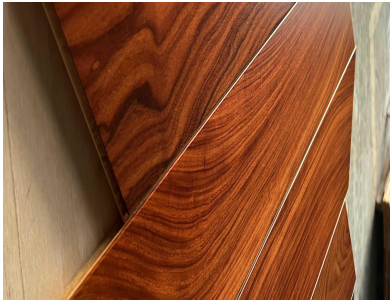

WOOD FLOORING TECHNICAL INFORMATION

PROJECT: Chevron Parquet	ITEM: MO-C01
COLLECTION	Santos Rosewood Chevron Parquet / 45°
Wood Species	Santos Rosewood / Morado
Grade	Grade A / Select Color
Construction	Engineered Wood Flooring
Size	760 * 100 * 15mm / 3mm Top Wear layer
Finish	Natural Matt Finish / Matching sample
Pattern	
CONSTRUCTION: ENGINEERED WOOD FLOORING	
DIMENSIONS:	
THICKNESS	15mm
WIDTH	100mm
LENGTH	760mm / Point to Point
Top layer	3mm Santos Rosewood
Back Layer	12mm Birch Plywood Base
Microbevel	0.5mm
Joint Type	Tongue & Groove
<p>3 MM Top Layer + 12 MM Plywood Base</p>	
PACKAGE	
10 Layers per pack, Carton size= 800x220x160mm,20pcs/Carton ;1.32 sq meters /Carton	
One Pallet containers 50 cartons	
Box Color: White/Natural	
Weight/Carton: 23kgs	

H * W * L(Pallet): 1200 * 1100 * 2200mm	
DEVIATIONS	
Devitation on Thinckness	+/-0.10mm
Devitation on Length	+/-1mm
Devitation on Width	+/-0.15mm
Cup	≤0.15% of the board width
Bow	≤1% of the board length
Squareness	≤0.3mm
Grade: A / Santos Rosewood Chevron Parquet	
	
Grade A AND SELECT COLOR	
DESCRIPTION	
Sapwood	NO Permitted
Color variation	Permitted Slight Color Variation
Live Knots	Permitted Single Seprate,1-2
Dead Knots	NO Permitted
Pollution	NO Permitted
Pin Knots	Permitted Single Seprate,1-3
Black line	Permitted Natural Grain
Wormholes	Permitted Single Seprate 2mm (Less than 3%)
Surface Cracks	NO Permitted
Gloss or Matt	Matt Finish
Wood Grain	Straight Grain mixing Mountain Grain
INSTALLTION	
	Glue down over dry wall and plywood or naildown over wooden subfloor or subwall. Applicable above ,on and below ground level.
STORAGE AND USAGE:	
Air humidity	40%-65%
Temperature	+18°-+22°C

Store wood flooring	Wooden flooring needs to be stored in a warm and dry environment. Never leave the boxes of flooring in a garage, shed or anywhere outdoors. Secondly, the conditions in the room need to be correct. Make sure that all wet trades, such as plastering, screed and painting, are finished.
FINISH	
DESCRIPTION:	
Type of Coating	American PPG UV Coating
Color	Natural
Surface(Finish) Type	Closed pores
Sheen	20-25°White UV Varnished,according the samples
Finish Warranty	10 years
MAINTAINACE AND CARE CONDITIONS:	
Maintaince of Hardwood flooring with finish assumes regular(daily if necesary) cleaning from dust and dirt using a vacuum.The operation of making oil on floor surface is easy, you just need brush surface with oil after sanding it clean.	